



**GeoPave**  
Endurance At Its Best



Dimension (mm) : 200 x 200  
Thickness (mm) : 60 / 80  
Weight (kg/pcs) : 4.9 / 6.5  
Coverage (pcs/m<sup>2</sup>) : 25

## AESTHETICS

- Variety of colours leads to interesting designs

## ABSOLUTE DURABILITY

- Minimal maintenance
- Hard wearing surface
- High skid resistance

## IMMEDIATE USE ADVANTAGE

- Can be opened to traffic immediately upon completion of paved area

## EASY ACCESS TO UNDERGROUND UTILITY SERVICES

- Can be lifted and relaid easily and rapidly without unsightly scars

## VERSATILE COLOUR CODING POSSIBILITIES

- Different permanent colours can be used to delineate separate areas
- Indicate parking bays
- Permanent road marking; location of underground services

## EASE OF LAYING

- Inaccessible areas with slopes and gradients can be paved without use of heavy equipment

## FUNGAL RESISTANCE

- Able to reduce the formation of fungus/algae on the paver surface

## LANDSCAPE & ARCHITECTURAL APPLICATIONS

### Thickness of 60mm

- Bicycle Path
- Footpath
- Jogging & Buggy Tracks
- Park & Garden Landscapes
- Patios
- Pedestrian Malls
- Pool Decks
- Residential Walkways
- Boulevard

### Thickness of 80mm

- Residential Driveway
- Internal Driveway
- Lobby/Drop-off Area

Compressive Strength		Tolerance	
60mm	30MPa	Thickness	±3mm
80mm,	45MPa	Dimension	±2mm
60mm, Z Series	45MPa		
MS1380 : 1995 (Specification for Precast Concrete Paving Blocks) (MA 20 Requirement : Australian Standard)			
BS 6717 : 1993 (Specification for Precast Concrete Paving Blocks)			

## EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. However, this efflorescence effect will disappear over time (weathering) whereby rain usually washes the efflorescence away in about six months to a year and in the worst-case scenario could take up to two years.

## ANTIQUÉ COLOURS



Various shades of Antique.

## STANDARD COLOURS




## PREMIUM COLOURS



Colours can be custom-made to suit your design requirements or preferences.

Note : Finished product colour may vary, subject to the colour of sand, cement and colour pigments used at the time of production.

## TYPICAL PAVEMENT CROSS-SECTION

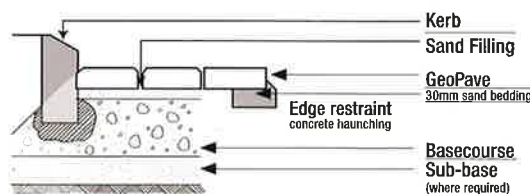

**SUNWAY™**  
BUILDING  
MATERIALS

**SUNWAY PAVING SOLUTIONS SDN BHD**  
(77490-W)

E-mail: [spssales@sunway.com.my](mailto:spssales@sunway.com.my)  
Website: [www.sunwaypavingsolutions.com](http://www.sunwaypavingsolutions.com)  
Facebook: [www.facebook.com/sunwaypavingsolutions](http://www.facebook.com/sunwaypavingsolutions)

### CENTRAL SALES & MARKETING OFFICE: BANDAR SUNWAY

#3.2, Level 3, Menara Sunway, Jalan Lagoon Timur,  
Bandar Sunway, 47500,  
Selangor Darul Ehsan, Malaysia.  
Tel: (+603) 5639 8282 Fax: (+603) 5639 9600, 5639 9606

### Factory: Batang Kali

Lot 10071, Mukim Batang Kali, 44300 Daerah Ulu Selangor,  
Selangor Darul Ehsan, Malaysia.  
Tel: (+603) 6057 2407 Fax: (+603) 6057 2423

### Northern Region Sales & Marketing Office/ Factory: Nibong Tebal

Lot 2788, 2796, 2797, Kawasan Perindustrian Bukit Panchor,  
Mukim 7, Nibong Tebal, Seberang Perai Selatan,  
14300 Pulau Pinang, Malaysia.  
Tel: (+604) 593 8697/8 Fax: (+604) 593 8695

### East Coast Region Sales & Marketing Office/Factory: Marang

Lot PT 16574, Kawasan Perindustrian, Bukit Kor,  
21600, Mukim Rusila, Marang, Terengganu Darul Iman.  
Tel: (+609) 617 3925 Fax: (+609) 617 3923

### Southern Region Sales & Marketing Office/ Factory: Senai

PL0 6, Jalan Lapangan Terbang, Fasa 1,  
Kawasan Perindustrian Senai, 81400 Senai,  
Johor Darul Takzim, Malaysia.  
Tel: (+607) 599 5553 Fax: (+607) 599 3827



Information contained within this flyer is correct at the time of printing (July 2015). Colours shown are reproduced as close to the actual colours as printing technology allows. Measurements are approximate. While every reasonable care has been taken in preparing this flyer, we cannot be held responsible for any inaccuracy. All illustrations are artist's impressions only. This flyer does not form any part of the contract.

**SUNWAY™**