

CDM

Double Suction Pump (Size : 200 to 1400m)



Horizontal Axially Split Double-Suction Pump

TORISHIMA CDM is designed with the most advanced hydraulics, providing less noise and vibration, wider operating range, lower NPSH required and higher efficiency. Higher pump efficiency saves energy and reduces life cycle cost.

Applications

Energy industry	: Water Intake, Distribution, Boosting, Circulation, Drainage, Fire-Fighting, Cooling Water
General industry	: Water Intake, Distribution, Boosting, Circulation, Drainage, Seawater Desalination, Fire-Fighting
Building	: Water Supply, Drainage, District Heating and Cooling
Water works	: Water Intake, Distribution, Water Supply
Agriculture	: Irrigation, Drainage
Others	: Pipe-Line Boosting, etc.

Technical Data

Capacity	: 180 to 33,000 m ³ /h (790 to 145,200 USgpm)
Total head	: 3 to 300 m (10 to 980 ft)
Size	: 200 to 1400 mm (8 to 55 in)
Temperature	: up to 80°C (175°F)

Types of Water Handled


Fresh water, Industrial water, River water, Sea water, Crude oil, etc.

Materials

Torishima's flexible manufacturing policy allows pumps to be produced in a wide range and combination of materials.

Volute casing	: Cast Iron, Ductile Cast Iron, Stainless Steel, Duplex Stainless Steel
Impeller	: Bronze, Stainless Steel, Duplex Stainless Steel
Shaft	: Carbon Steel, Chrome-Molybdenum Steel, Stainless Steel, Duplex Stainless Steel
Shaft Sleeve	: Stainless Steel, Duplex Stainless Steel

Mounting Options of Vertical Design

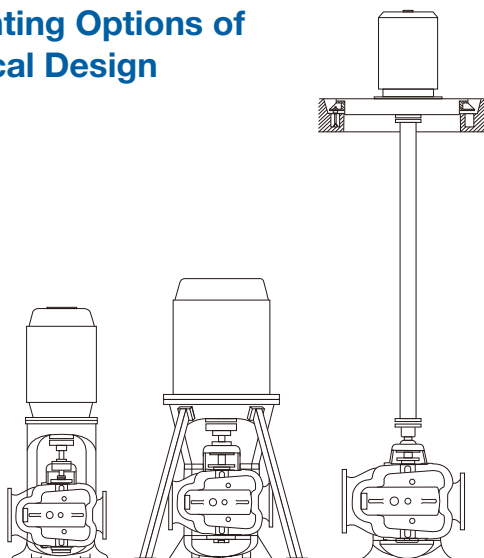

Potable Water Transmission pump
CDM800×500mm, 4,740m³/h, 250m, 4,700kW



Irrigation Pump
CDM800×600mm, 4,200m³/h, 60m, 900kW



Potable Water Pump CDM400×350mm, 1,620m³/h, 35m, 200kW
CDM350×300mm, 1,080m³/h, 35m, 150kW



Potable Water Pump
CDMV350×300mm, 1,137m³/h, 45m, 185kW

Design Features

Bearing Options


- Grease-lubricated ball bearing
- Oil-lubricated bearing is available for high temperature pumped liquid or in accordance of standards.
- Sleeve radial bearing and/or tilting pad type thrust bearing are available for engineering CDM range when required.

Impeller

Double Entry is hydraulically balanced to reduce axial thrust and NPSH requirements. Multiple hydraulics cover wide operation range to maximize optimum efficiency and reliability.

Shaft Seal

Torishima brand component type mechanical seals are fitted as standard. Alternatively, cartridge type seal and gland packing are available upon request.

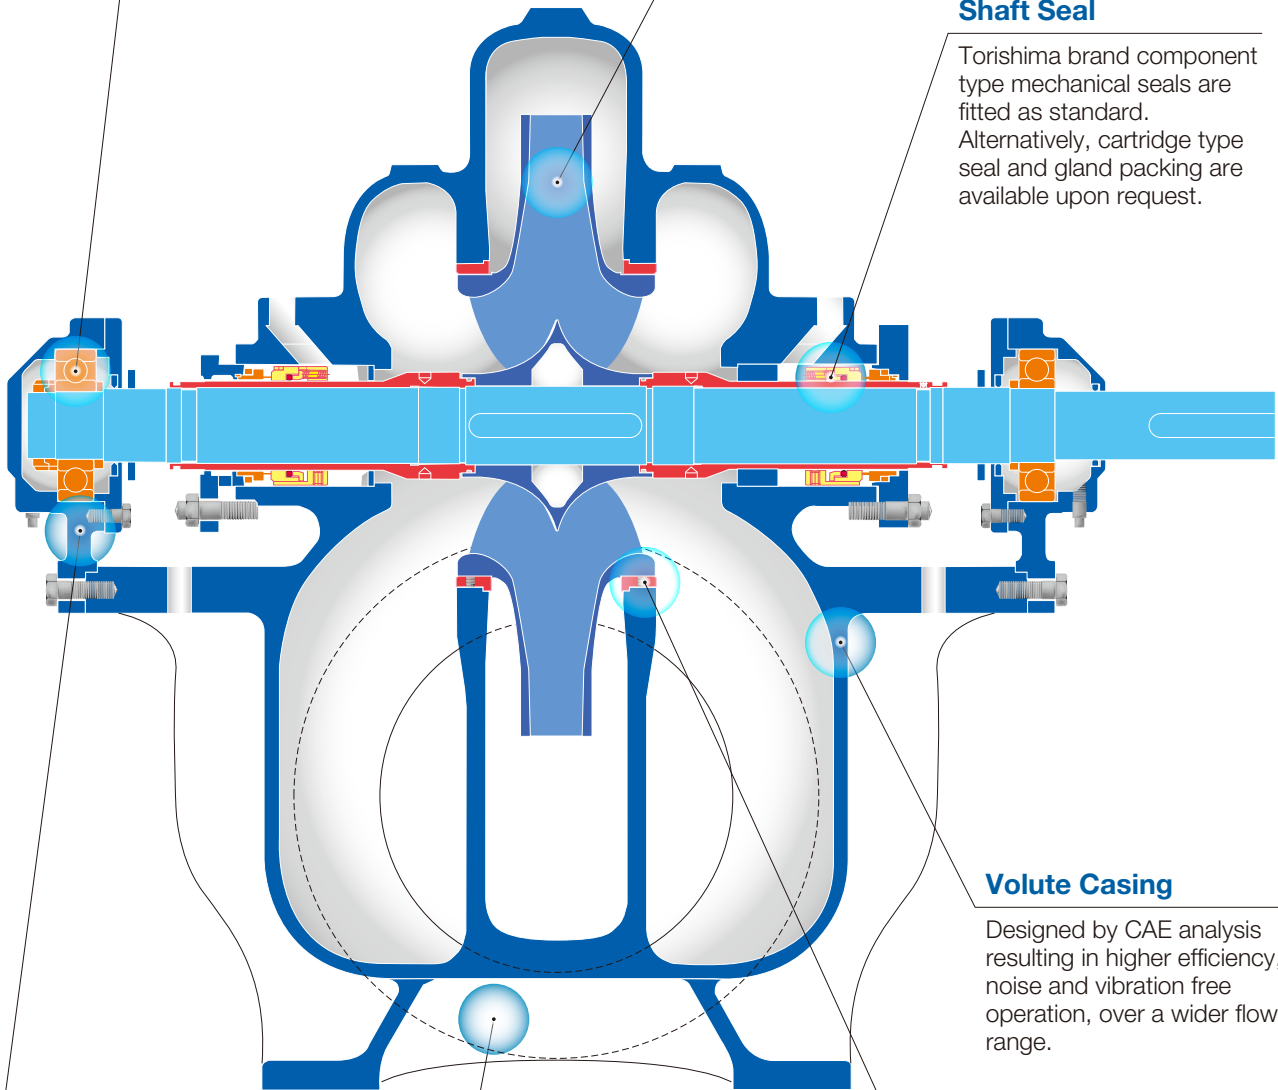

Bearing Support

Integral bearing support gives more rigid construction, reduces shaft deflection, and improves bearing and seal life.

Suction & Discharge Flanges

Flange can be drilled to meet various international standards such as JIS, ASME, EN, ISO, etc.

Volute Casing




Designed by CAE analysis resulting in higher efficiency, noise and vibration free operation, over a wider flow range.

Wear Rings

Casing wear rings are fitted as standard and replaceable for longer life span. Optional Impeller Wear rings are available upon request.




Performance Range

- Black Line - Pump Head
- Pink Line - Motor Rating in kW

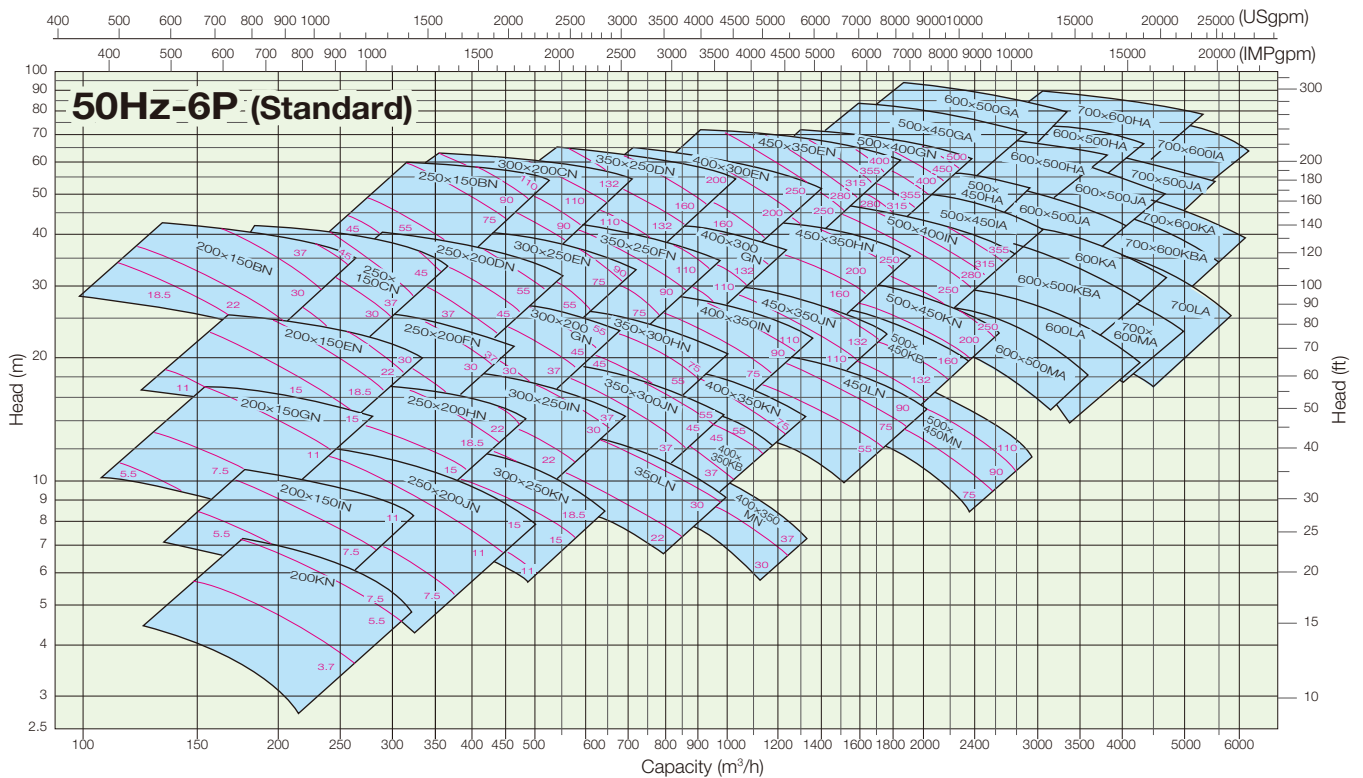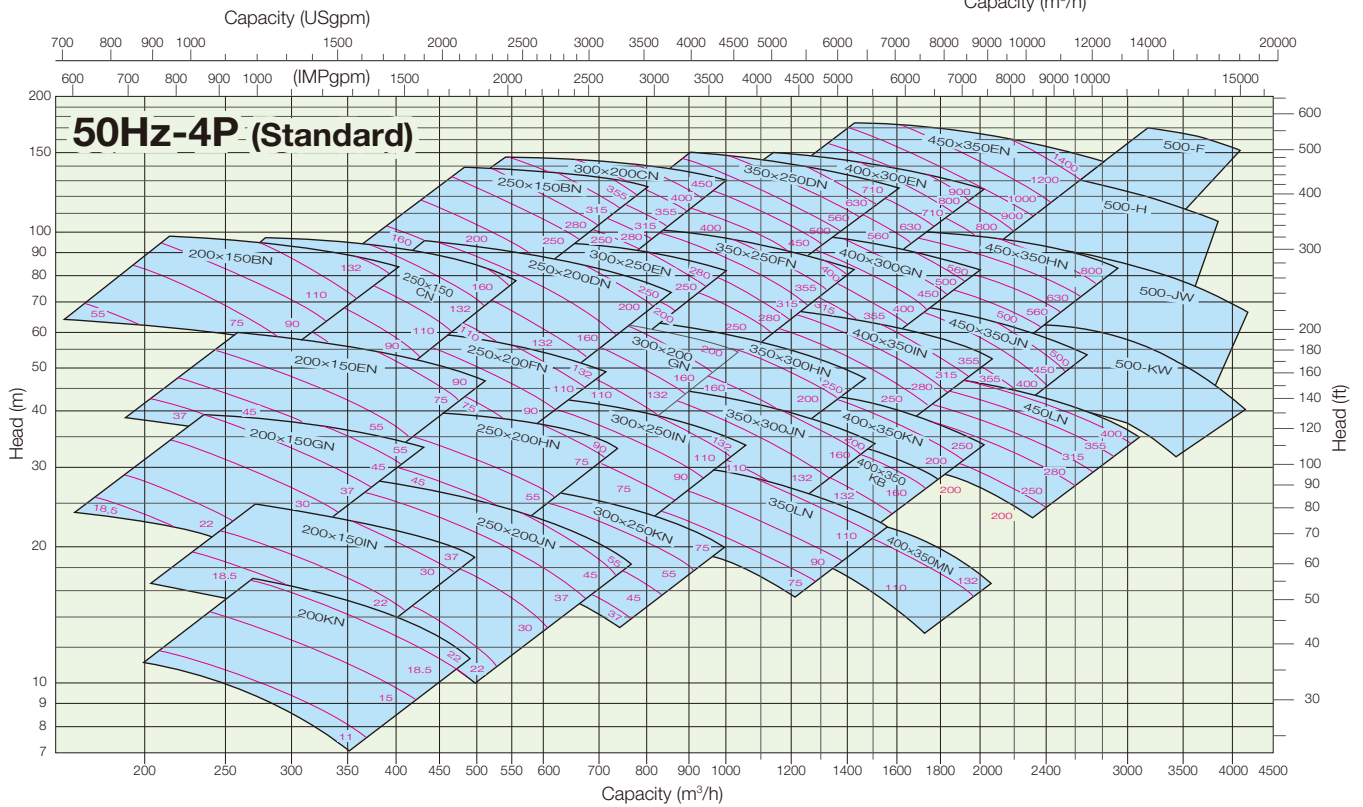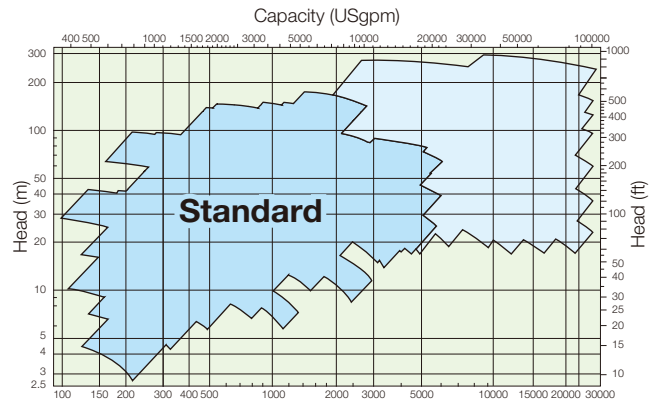

Performance Range

- Black Line - Pump Head
- Pink Line - Motor Rating in kW

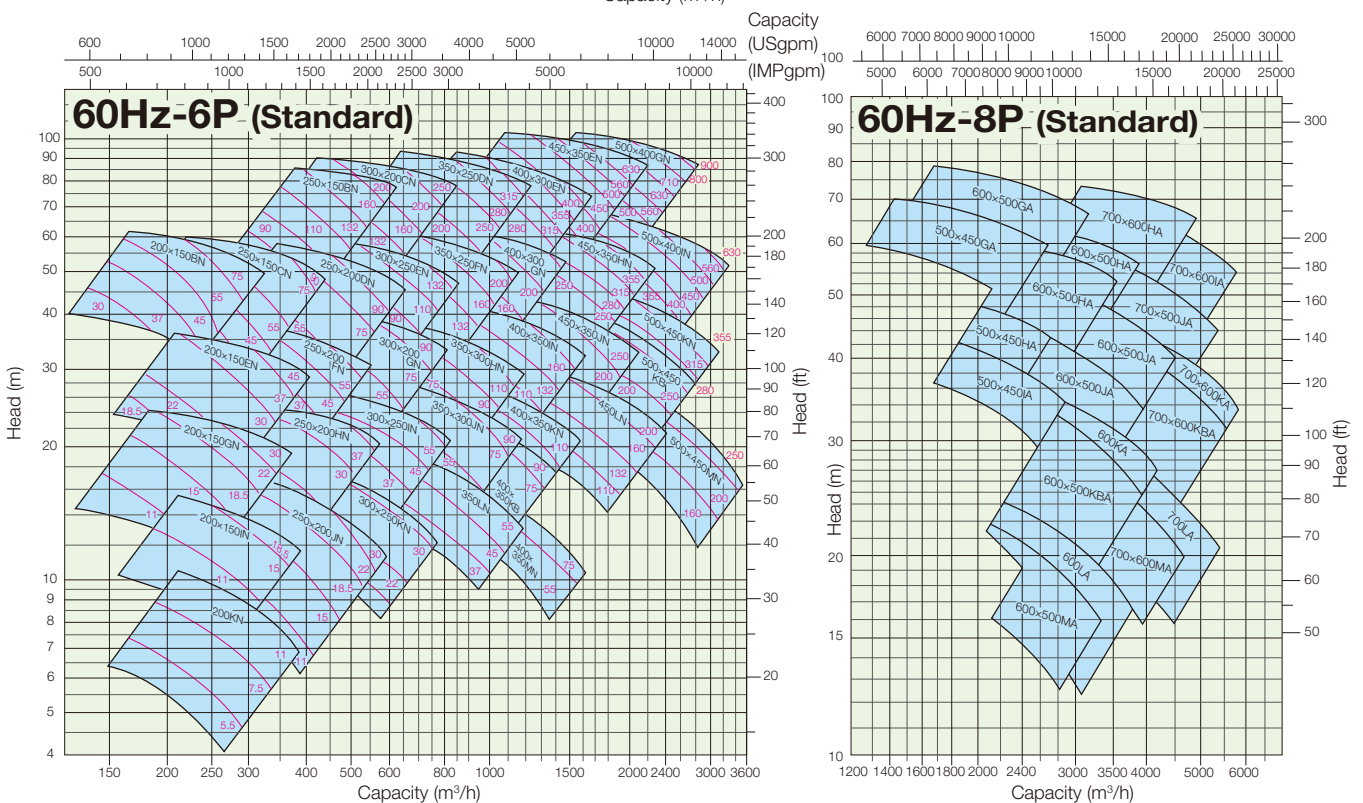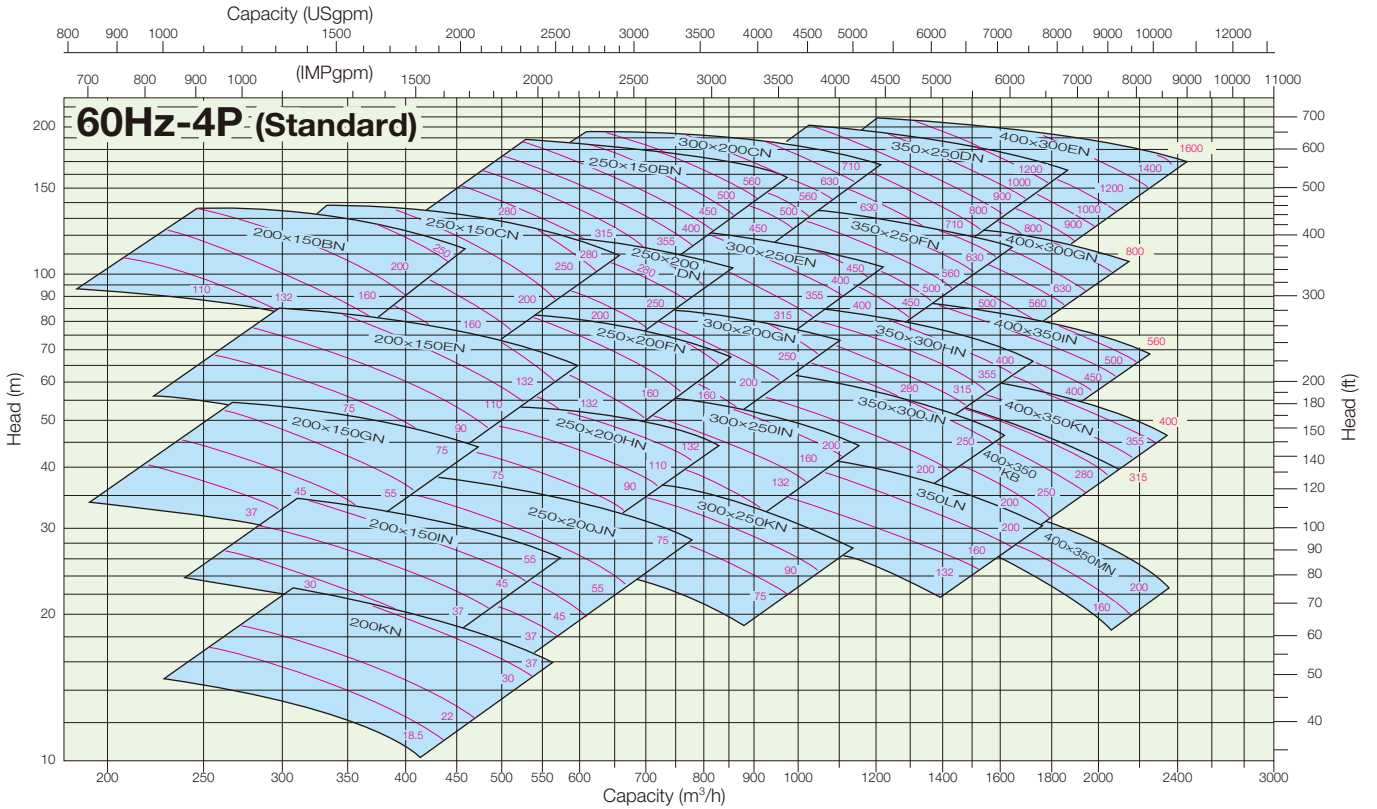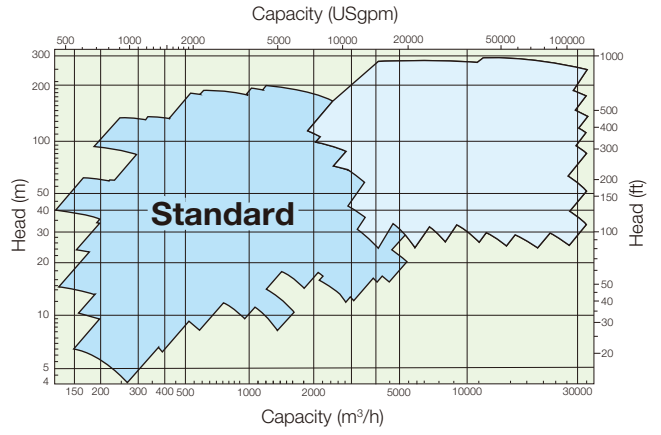

Torishima Pump Global Network



East Asia

1 Torishima Pump Mfg. Co., Ltd. ■ ■
1-1-8 Miyata-cho, Takatsuki-city, Osaka 569-8660 Japan
Tel : +81-72-690-2308 / Fax : +81-72-690-2329

2 Kyushu Torishima Co., Ltd. ■
9857-13, Ohaza Kawako, Wakagi-cho, Takeo-city,
Saga 843-0151 Japan
Tel : +81-954-26-3081 / Fax : +81-954-26-3080

**3 Torishima Pump Mfg. Co., Ltd.
Beijing Office**
Rm707, Building 1, KUNSHA CENTER,
No.16 Xinyuanli, Chaoyang District,
Beijing, P.R.China PC:100027
Tel : +86-10-84682891 / Fax : +86-10-84682890

4 Torishima Pump (Tianjin) Co., Ltd. ■ ■
No.9 Gaoxin Road, Wuqing Development Zone,
Tianjin, P.R.China PC:301700
Tel : +86-22-59695601 / Fax : +86-22-59695609

5 Torishima (Hong Kong) Ltd.
Unit A, 21/F., Tower A, Billion Centre, 1 Wang Kwong
Road, Kowloon Bay, Kowloon, Hong Kong
Tel : +852-2795-1838 / Fax : +852-2754-3293

**6 Torishima Service Solutions
Formosa Co., Ltd.** ■
2F-1, No.99, Minfu St., Linkou Dist.,
New Taipei City 244, Taiwan
Tel : +886-2-26003381 / Fax: +886-2-26002986

South East Asia

**7 Torishima Pump Mfg. Co., Ltd.
Singapore Office**

8 Torishima Service Solutions Asia Pte. Ltd. ■
60 Benoi Road #01-07 Singapore 629906
Tel : +65-6933-8772 / Fax : +65-6933-8777

9 P.T. Torishima Guna Engineering ■

10 P.T. Torishima Guna Indonesia ■
Jalan Rawa Sumur Timur No.1 Pulogadung
Industrial Estate, P.O.Box 1160, Jakarta, Indonesia
Tel : +62-21-460-3963 / Fax : +62-21-460-3937

11 P.T. Geteka Founindo ■

JL Pulo Ayang Kav. AA2 Pulogadung Industrial
Estate, P.O.Box 1160 JAT, Jakarta 13011 Indonesia
Tel : +62-21-460-3963 / Fax : +62-21-460-3937

**12 Torishima Service Solutions Asia Pte. Ltd.
Philippines Office**
9/F Filinvest One Building, Alabang-Zapote Road,
Filinvest City, Alabang, Muntinlupa City 1781 Philippines
Tel : +63-917-675-5225

**13 Torishima Service Solutions
(Thailand) Ltd.** ■
181/2 Moo 1, Soi Bancha, Suksawad Road,
Pakklong Bangplakod, Prasadutjedi, Samutprakarn
10290, Thailand
Tel : +66-2-408-3528 / FAX : +66-2-408-3529

**14 Torishima Service Solutions Asia Pte. Ltd.
Vietnam Office**
52 Bui Thi Xuan Street, Hai Ba Trung District,
Hanoi City, Republic Socialist of Vietnam
Tel : +84-4-3633-1446 / Fax : +84-4-3662-8555

South Asia

15 Torishima Pumps (India) Pvt. Ltd.
302 & 302A, 3rd Floor, Tower-B, Millennium Plaza,
Sector27 Gurgaon-122002, Haryana, India
Tel : +91-124-4728950 / Fax : +91-124-4728950

**16 Torishima Pumps (India) Pvt. Ltd.
Service Division** ■
Plot No. 27 B, C, D, Hoskote KIADB Industrial Area,
Chokkahalli Village, Kasaba Hobli, Hoskote Taluk,
Bengaluru-562114, Karnataka, India
Tel : +91-80-39581000 / Fax : +91-80-39581010

Oceania

17 Torishima Australia Pty. Ltd.
643-645 Glenhuntly Road, Caulfield South
VIC 3162 Australia
Tel : +61-3-9523-7998

Middle East

18 Torishima Service Solutions FZCO ■
Plot of Land TP010501 National Industries Park
(Techno Park)-Jebel Ali, PO Box. 37603 Dubai,
U.A.E.
Tel : +971-4-880-7344 / Fax : +971-4-880-7354

**19 Torishima Pump Mfg. Co., Ltd.
Middle East Project Office**
Office No.901, Deluxe Tower, Delma Street,
Al Nahyan Camp Area, P.O.Box 53567,
Abu Dhabi, U.A.E.
Tel : +971-2-674-3880 / Fax : +971-2-674-3881

**20 Torishima Pump Mfg. Co., Ltd.
Qatar Project Office**
Office No.11,1st Floor, West Corner Centre,
Salwa Road-Midmac R/A, P.O.Box 37027 Doha, Qatar
Tel : +974-4450-6915 / Fax : +974-4450-6916

**21 Torishima Service Solutions
(Saudi Arabia) Ltd.** ■
Dammam, 2nd Industrial City,
Road # 148- Cross # 81,PO Box 31952
Al Khobar, Kingdom of Saudi Arabia
Tel : +966-3-887-1500

**22 Torishima Pump Mfg.Co., Ltd.
Saudi Arabia Representative Office**
Al Riyadh, Al Khair Plaza, Office No.2
Al Amir Muhd IBN A.A. Road, Althalea,
SP-643351929, Kingdom of Saudi Arabia
Tel : +966-11-2931355

Europe

23 Torishima Europe Ltd.
Duart House, Finch Way, Strathclyde Business Park,
Bellshill, North Lanarkshire ML4 3PR Scotland, U.K.
Tel : +44-1236-443951 / Fax : +44-1236-702875

**24 Torishima Service Solutions
Europe Ltd.** ■
Unit 3, M8 Interlink, Kirkshaws Road, Coatbridge
ML5 4RP Scotland, U.K.
Tel : +44-1236-442390 / Fax : +44-1236-702875

25 Torishima Europe Ltd. Madrid Office
Avda. Fuente Nueva 12A, 28703San
Sebastian de los Reyes, Madrid, Spain
Tel : +34-91-002-7541 / Fax : +34-91-284-6901

North America

**26 Torishima Pump Mfg. Co., Ltd.
North America East Office**
100 Grove Street, Suite 217, Worcester
MA 01605-2654 U.S.A.
Tel : +1-508-753-6600 / Fax : +1-508-753-8276

Central America

27 Torishima Europe Ltd. Mexico Office
Plateros No.58A, Fracc La Concordia,
Lomas Verdes 5a Sección, Naucalpan de Juarez,
Estado de México. C.P. 53120
Tel : +52-1-55-51935-4311


■ Manufacturing ■ Service Center

CDMV

Vertical Double Suction Pump


Applications

Energy Industry	Water Intake, Distribution, Boosting, Circulation, Drainage, Fire-Fighting
General Industry	Water Intake, Distribution, Boosting, Circulation, Drainage, Seawater Desalination, Fire-Fighting
Building	Water Supply, Drainage, District Heating and Cooling
Water Works	Water Intake, Distribution, Water Supply
Agriculture	Irrigation, Drainage
Others	Pipe-Line Boosting, etc.

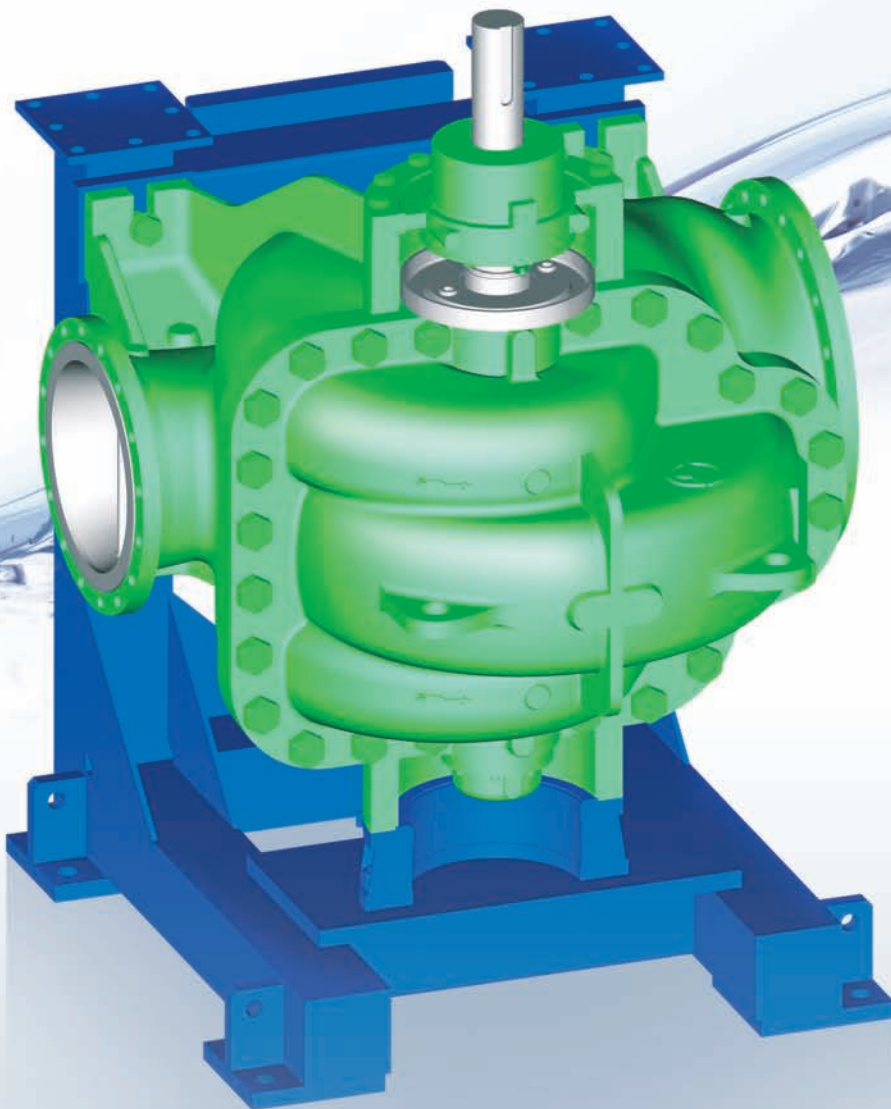

CDMV-Vertical Double Suction Pump

- ✓ Compact & High Efficiency Design for Low Life Cycle Cost & Energy-Saving
- ✓ Installable at Limited Space

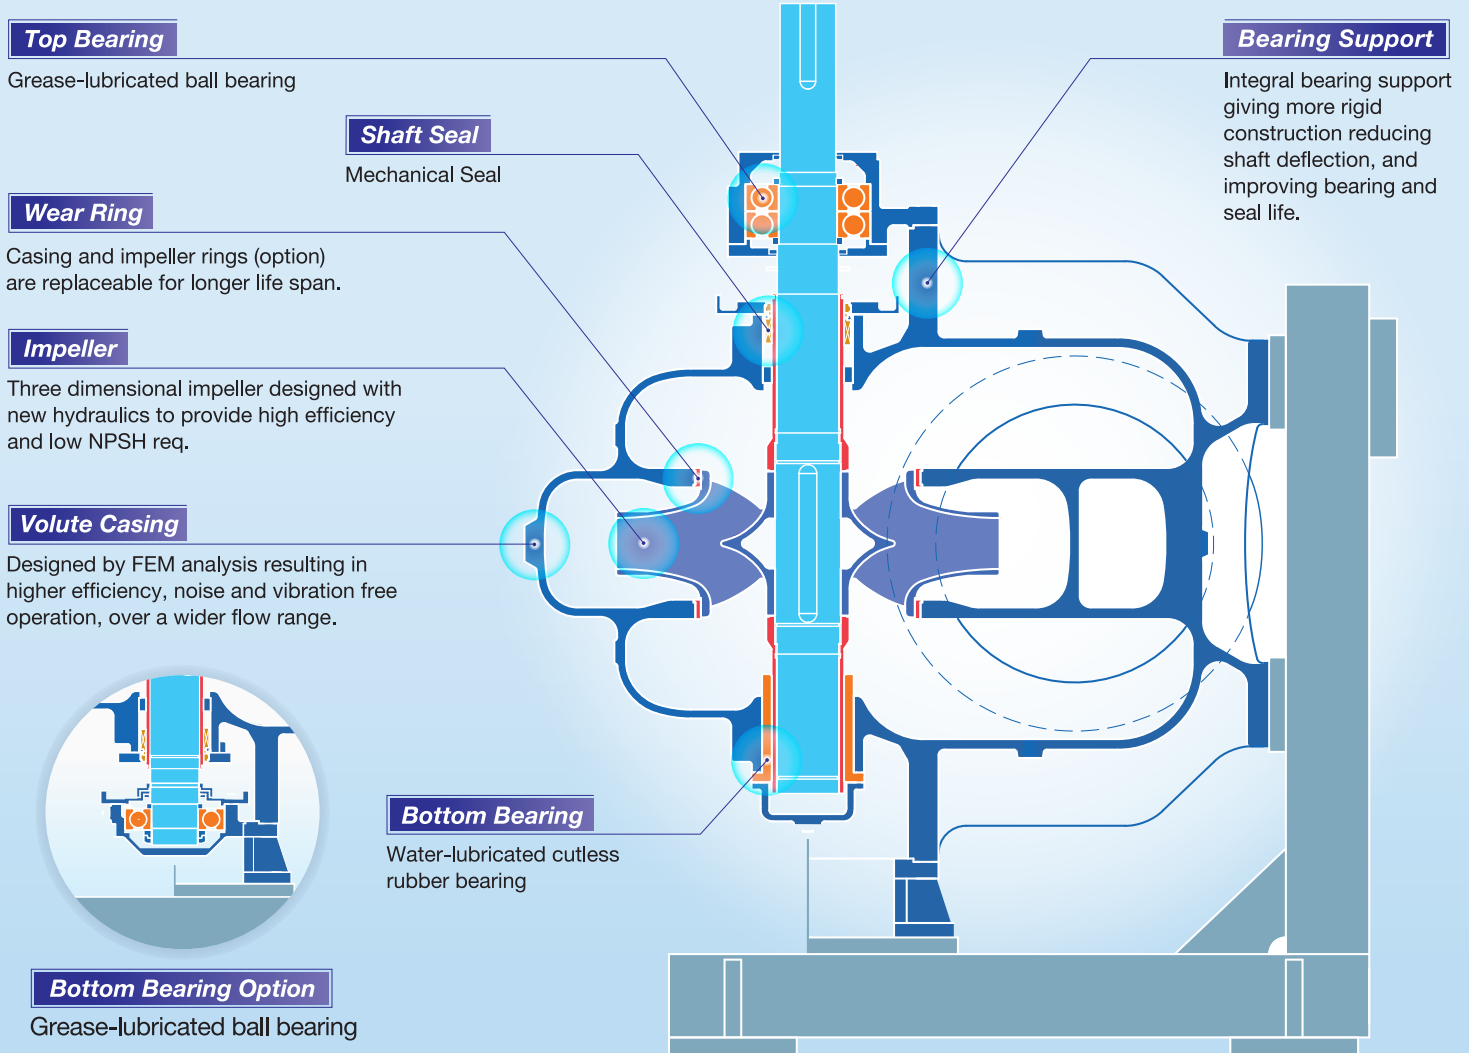

Technical Data

- Capacity :** 100 to 3,400m³/h
- Total Head :** 3 to 220m (10 to 720ft)
- Temperature :** up to 80°C (176°F)
- Size :** 200 to 500 mm (8 to 20 in)

Materials

- ◆ **Volute casing**
Cast Iron, Ductile Cast Iron, Stainless Steel, Duplex Stainless Steel
- ◆ **Impeller**
Cast Iron, Bronze, Stainless Steel, Duplex Stainless Steel
- ◆ **Shaft**
Carbon Steel, Chrome-Molybdenum Steel, Stainless Steel, Duplex Stainless Steel
- ◆ **Shaft Sleeve**
Bronze, Stainless Steel, Duplex Stainless Steel

Performance Range

